

Item # CX9999, High Pressure Cross Fittings

QUOTE

High Pressure Cross Fittings


All Autoclave Engineers valves and fittings are supplied complete with appropriate glands and collars. To order these components separately, use order numbers listed. When using plug, collar is not required.

To ensure proper fit use Autoclave Engineers tubing.

All dimensions for reference only and subject to change. For prompt service, Autoclave stocks select products. Consult your local representative.

Fittings such as 45° elbows, reducer elbows, and reducer 45° elbows are available upon request. For mounting hole option add suffix PM to catalog number, consult factory for mounting hole dimensions. Contact your local sales representative for additional information.

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

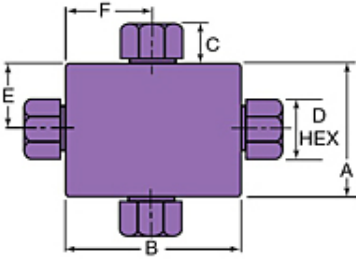

SPECIFICATIONS

Connection Type	F562C
Outside Diameter Tube	9/16 Inch 14.29 mm
Pressure Rating	60000 psi 4136.79 bar
Minimum Opening	0.188 Inch 4.78 mm
A - Height	2.75 Inch 69.85 mm
B - Width	2.62 Inch 66.55 mm
C - Height	0.81 Inch 20.57 mm
D - Typical Hex	1.19 Inch 30.23 mm
E - Length	1.38 Inch 35.05 mm
F - Length	1.31 Inch 33.27 mm

Block Thickness

1.50 Inch
38.10 mm